
Lockin Smart Lock User Manual


01 Product Introduction

Please read this manual carefully before using the product and keep it in a safe place.

This product is an IoT smart lock that supports unlocking via fingerprint, password, NFC, mobile Bluetooth, and emergency key. It also offers features such as remote alerts for anomalies and the ability to view unlocking records remotely. The lock can be configured using the Mi Home app, and when paired with other Mi Home smart devices, it enables smart home functions such as automated control and linked alerts.

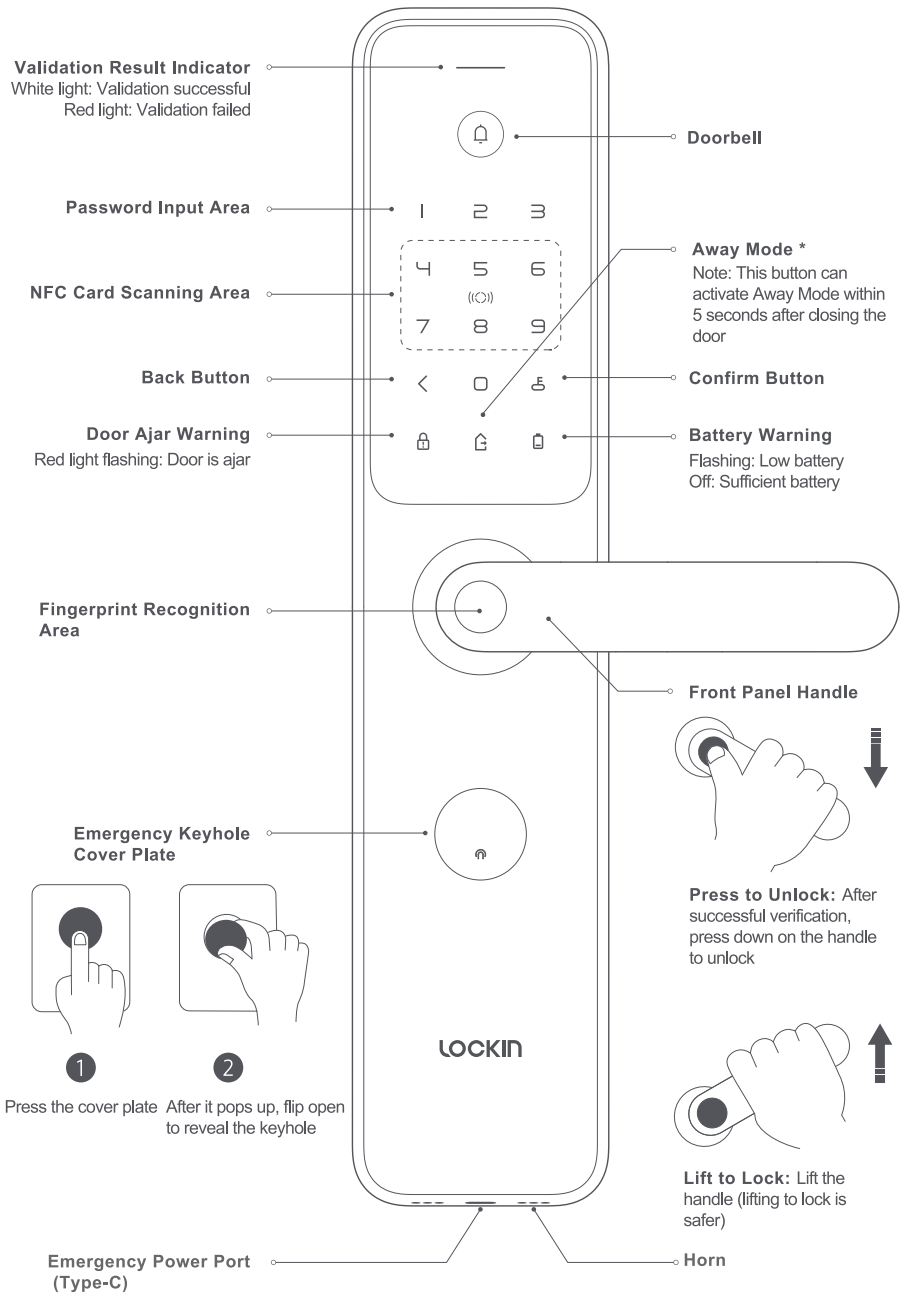


* Remote alarm alerts, remote access to unlocking records, and intelligent linkage features require devices equipped with Bluetooth gateway functionality to be used.
* Leave Home Mode: You need to enable the Leave Home Mode feature in the Mi Home app and set up smart scenes before using this button to activate the Leave Home Mode.

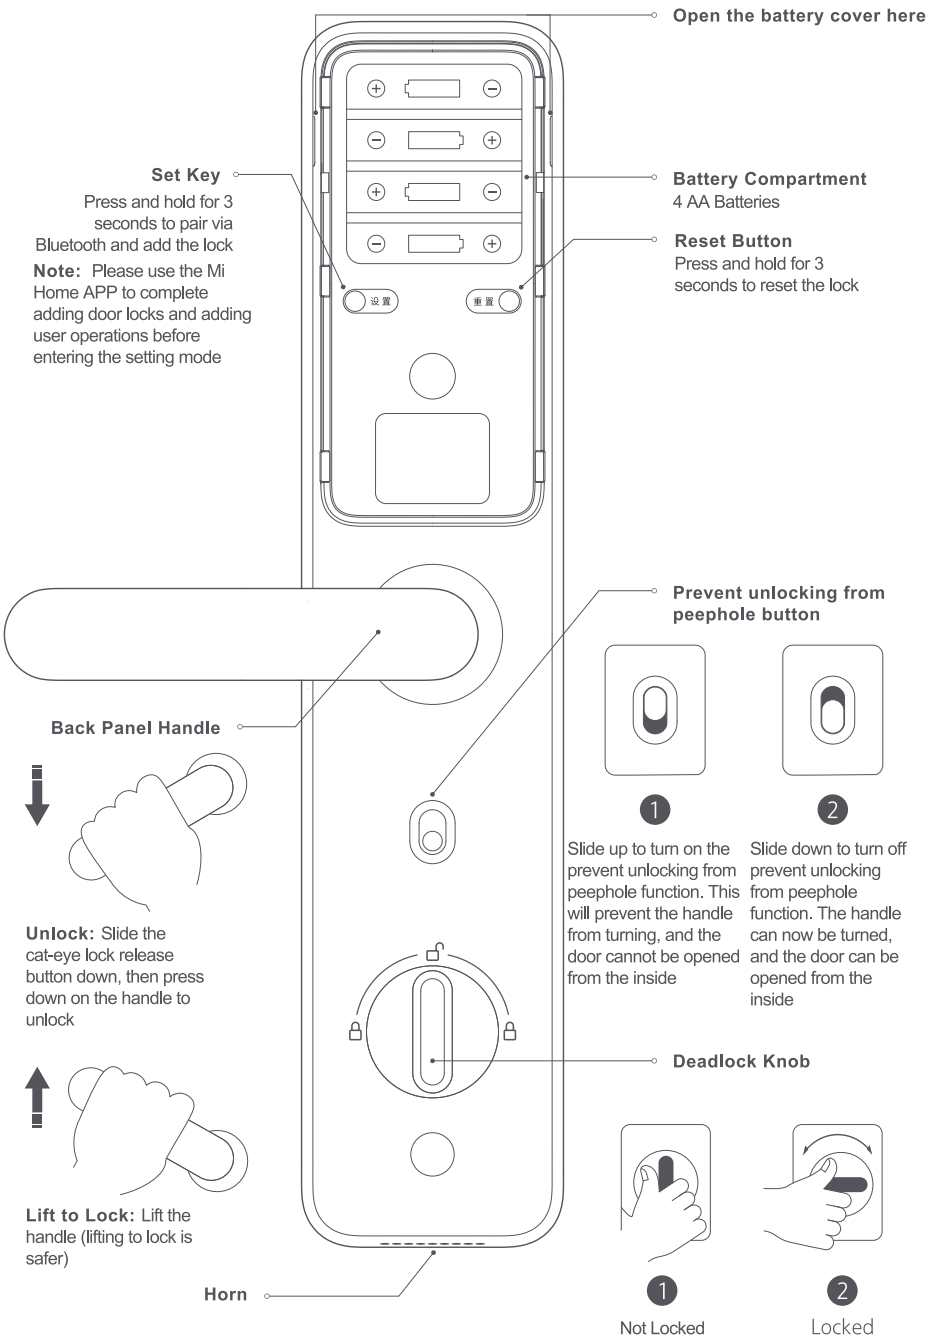



Note: The product, accessories, and user interface illustrations in the manual are schematic and for reference only. Due to updates and upgrades, the actual product may vary slightly from the illustrations. Please refer to the actual product.

02 Accessories List

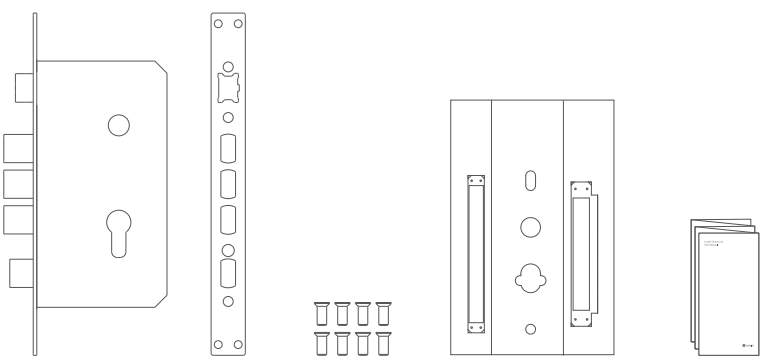

Lock Body× 1 | Strike Plate× 1 | Lock Body Screws×8 | Installation Hole Diagram×1 | User Manual×1

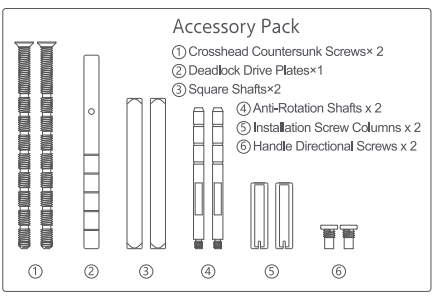



03 Lock Installation

The door lock installation process involves the use of specialized tools that can be hazardous. Please ensure that a professional installs the lock.

04 Preparation for Use

Please open the battery cover and insert 4 AA batteries.

Note: Regular dry batteries may leak over time. It is recommended to check the battery status every three months to prevent leakage from damaging the door lock.
When replacing the batteries, ensure that you use alkaline dry batteries. Using other types of dry batteries may affect the lock's performance and battery life.

05 Quick Setup

1 Connecting to the Mi Home App

This product is compatible with the Mi Home app, allowing you to control it through the app and integrate it with other products.
Scan the QR code to download and install the Mi Home app. Users who already have the app installed will be taken directly to the device connection page. Alternatively, search for "Mi Home" in the app store to download and install the app. Open the Mi Home app, tap the "+" icon in the top-right corner of the homepage, select "Lockin Smart Lock," and follow the on-screen instructions to add the device.
Note: After the lock is successfully added, it will automatically connect to the Bluetooth gateway device linked to your account, with no further configuration needed. The lock's Bluetooth communication range is 10 meters, and walls or other obstacles may reduce this range.

Due to updates and upgrades to the Mi Home app, the actual process may differ slightly from the description above. Please follow the instructions provided in the current version of the app.

About 'works with Xiaomi Home'
'works with Xiaomi Home' signifies that the product herein is designed to connect and interact with Xiaomi Home APP. Please be noted that the product herein is certified by the APP interaction only. Xiaomi and Mijia are not responsible for any of the product manufacturing, safety and regulatory standards, or quality supervision.

works with Xiaomi Home

Download the Mi Home app for more intelligent experiences


2 Adding a user

Enter the door lock device page and follow the prompts of the Mi Home APP to add the first user (default is administrator).
Note: The door lock cannot be locked normally without adding user status.

06 Daily Use

Verification Successful: The indicator light bar will turn white, accompanied by a success sound effect (if not in silent mode).
Verification Failed: The indicator light bar will turn red, accompanied by a failure sound effect (if not in silent mode).

Fingerprint Unlock

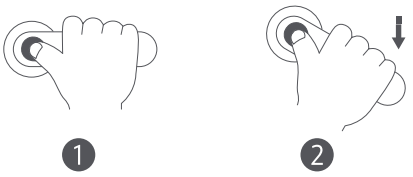


1. Gently press the registered finger on the fingerprint sensor;
2. Once verification is successful, press down on the handle to unlock.

Password Unlocking




1. Enter the password that has been previously set and press the confirm button;
2. Once verified, press down on the handle to unlock.

NFC Unlocking

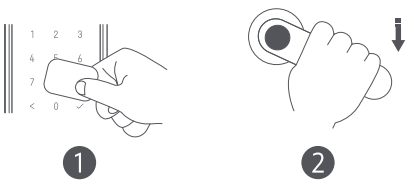

1. Place the registered card near the recognition area;
2. Once verified, press down on the handle to unlock.


Emergency Key Unlocking

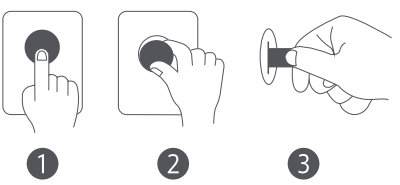

1. Press the button below the cover plate "⋒" ;
2. Once it pops up, pry it open to reveal the keyhole;
3. Use the emergency key to unlock.


Note: Do not leave the emergency key locked inside the house. Store it in a safe and accessible place for use in emergency situations.

Indoor Unlocking

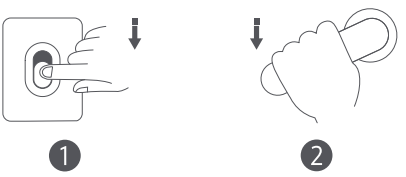

1. Slide the lock release button below the peephole down to unlock;
2. Press down on the handle to unlock.

Indoor/Outdoor Locking (Lift to Lock)

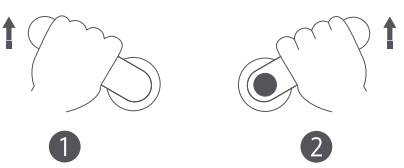

1. Indoor: After closing the door, lift the handle to lock.
2. Outdoor: After closing the door, lift the handle to lock.

Note: Whether you're leaving or entering, always lift the handle to lock the door. This will ensure maximum security.

Indoor Deadlock



1. To engage the deadlock: Rotate the knob 90° clockwise or counterclockwise until it is in the horizontal position.
2. To disengage the deadlock: Rotate the knob 90° clockwise or counterclockwise until it is in the vertical position.

Note: Once the indoor deadlock is engaged, the door cannot be unlocked from the outside using fingerprints, password, NFC, or a mechanical key, nor can it be unlocked from the inside using the handle.

07 Basic Parameters

Product Name: Smart Lock

Model: TFPL407

Power Supply: 4 AA batteries、Type-C Emergency Power Supply (5V ⎓ 0.5A)

Product Dimensions:

370×79×20mm (Front Panel)

370×79×19.5mm (Back Panel)

Product Net Weight: 3.3kg

Product Safety Level: B (GA 374-2019)

Lock Core Safety Level: C

Operating Temperature: -10℃ ~ 55℃

Wireless Connectivity: Bluetooth 5.0, NFC

Operating Humidity: 0~93% RH, non-condensing

08 Legal Statement, Name and Content of Harmful Substances in the Product, and Micropower Short-Range Device Statement

Intellectual Property Statement

The intellectual property rights in trademarks such as Lockin, product patents, or related software copyrights contained in this product and product manual are owned by Lockin Technology or relevant licensors. Without the permission of Lockin Technology and relevant rights holders, no one is allowed to infringe upon the above intellectual property rights by any means (including, but not limited to, copying, adaptation, decompiling, disassembling, decrypting, renting, transferring, sub-licensing, etc.) unless otherwise stipulated by law.

Limitation of Liability

Lockin Technology, to the extent permitted by law, shall not be liable for any indirect loss (e.g., goodwill, expected gains) or consequential damage resulting from the use of the product by users under any circumstances, unless otherwise stipulated by law.

Personal Information and Data Security

Under the Law of the People's Republic of China on Personal Information Protection, the collection of personal information requires individual consent. Since relevant personal information within the visible range of the product may be collected when the peephole function of this product is used, it is recommended that you use this function with caution and reasonably choose the use scope of the product (product scope, stay time, storage time are optional); if necessary, please inform relevant persons (e.g. neighbors) and obtain their consent before using this product; For details on the collection and use of your personal information, please see the lock privacy policy (how to view it: open Mi Home, go to Plug-in -> Home -> More in the upper right corner -> General Settings -> More Settings -> Legal Information -> Privacy Policy). Please read it carefully to avoid any security risks such as illegal use of product or leakage of personal information.

09 Name and Content of Harmful Substances in the Product

Component	Harmful Substance					
	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Circuit board component	O	O	O	O	O	O
Electrical component	O	O	O	O	O	O
Plastic component	O	O	O	O	O	O
Metal component	X	O	O	O	O	O
Battery	O	O	O	O	O	O
Accessories	O	O	O	O	O	O

This form is made according to standard SJ/T 11364.

O: Indicates harmful substance content in all homogeneous materials of the component is below the limit stipulated in GB/T 26572.
X: Indicates harmful substance content in a single homogeneous material of the component exceeds the limit stipulated in GB/T 26572.

10 Micropower Short-Range Device Statement

I.NFC applied in this product is in line with the technical requirements for general-purpose micropower equipment of Class C in the Micropower Short-Range Radio Transmission Equipment Catalogue and Technical Requirements and is used for data transmission applications. It uses an integrated antenna. For control adjustment, switch and others, please refer to the relevant content in the product manual;
II.The intended use or use conditions shall not be changed without authorization; the transmission frequency range shall not be expanded; the transmission power rate (including installing an additional RF power amplifier) shall not be increased; the transmission antenna shall not be changed without authorization;
III.No harmful interference shall be caused to other lawful radio stations and no claim for protection from harmful interference shall be made;
IV.The equipment shall withstand the interference of industrial, scientific and medical (ISM) application equipment radiating RF energy or other legitimate radio stations;
V.In case of harmful interference to other lawful radio stations, users shall stop using this product immediately and take measures to eliminate interference before continuing to use it;
VI.The use of micro-power equipment in aircraft and in electromagnetic environment protection areas of military/civil radio (stations) such as meteorological radar stations, satellite earth stations (including measurement and control, ranging, receiving, navigation station) and airports established in accordance with laws, regulations, relevant national requirements and standards, shall comply with the regulations on electromagnetic environment protection and requirements of relevant authorities.
VII.It is forbidden to use any kind of remote control module within the area with a radius of 5,000 meters with the airport runway center as the center.
VIII.The environmental conditions of temperature and voltage for micropower device apply to this product.
IX.Operating temperature of micropower device:-10°C~+55°C, power supplied by lithium battery: 7.4V.

11 Battery Warnings

Charging instructions:

- Only batteries approved by the manufacturer can be used for the product. Replacing the batteries with wrong models may cause safety protection failure, explosion, fire and other hazards.
- Do not expose the batteries to extremely high-temperature environments, such as sunlight, fire, microwave oven, or oven. Failure to do so may cause an explosion and leakage of flammable liquids or gases.
- Do not disassemble, hit, crush or cut the batteries, otherwise, an explosion may occur.
- Do not expose the batteries to extremely low air pressure, otherwise, battery explosion and leakage of flammable liquids or gases may occur.
- If the batteries are severely swollen, do not use them any longer.
- Do not swallow the batteries, because this may lead to chemical burns.
- If you think a battery may have been swallowed or placed inside any part of your body, seek medical assistance immediately.
- If you think a battery may have been swallowed or placed inside any part of your body, seek medical assistance immediately.
- If any battery compartment cover cannot close securely, stop using the product and keep it away from children.
- Keep children away from any new and used batteries.
- Do not dispose of the batteries as household waste. Please dispose of used batteries properly as required by applicable national regulations. This product contains coin cell batteries, which, if swallowed, may cause severe internal burns and lead to death within 2 hours.

Declaration of Conformity Hereby, Lockin Technology（Beijing）Co., Ltd. declares that the radio equipment type TEPL407 is in compliance with directive 2014/53/EU.

CE

The full text of the EU declaration of conformity is available at the following internet address://www.lockin.com

RF exposure information: The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of d=20 cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body.

	Operation Frequency	Max.Power
Bluetooth	2402-2480 MHz	EIRP 9.89 dBm
NFC	13.56MHz	-13.18 dBμA/m at 10m

Do not use the device in the environment at too high or too low temperature, never expose the device under strong sunshine or too wet environment. The suitable temperature for the product is -10~55℃.

When charging, please place the device in an environment that has a normal room temperature and good ventilation. It is recommended to charge the device in an environment with a temperature that ranges from 0℃~40℃.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Contact us

Manufacturer: Lockin Technology（Beijing）Co., Ltd.
Address: Room 1101, 11th Floor, Building 1, No. 81 Beiqing Road, Haidian District, Beijing, P.R.China